

Specifications

| Models | GS-2669 RT | | GS-3369 RT | | GS-4069 RT | |
|--|------------|-------------|------------|-------------|------------|------------|
| Measurements | Metric | US | Metric | US | Metric | US |
| Working height maximum* | 9.70 m | 31 ft 9 in | 11.75 m | 38 ft 6 in | 14.12 m | 46 ft 3 in |
| A Platform height maximum | 7.70 m | 25 ft 3 in | 9.75 m | 31 ft 11 in | 12.12 m | 39 ft 9 in |
| B Platform height - stowed | 1.47 m | 4 ft 10 in | 1.47 m | 4 ft 10 in | 1.65 m | 5 ft 5 in |
| C Platform length - outside | 2.79 m | 9 ft 2 in | 2.79 m | 9 ft 2 in | 2.79 m | 9 ft 2 in |
| extended ¹ | 4.31 m | 14 ft 2 in | 4.31 m | 14 ft 2 in | 4.31 m | 14 ft 2 in |
| Slide-out platform extension deck ¹ | 1.52 m | 5 ft | 1.52 m | 5 ft | 1.52 m | 5 ft |
| D Platform width - outside | 1.6 m | 5 ft 3 in | 1.6 m | 5 ft 3 in | 1.6 m | 5 ft 3 in |
| Toeboard height | 0.15 m | 6 in | 0.15 m | 6 in | 0.15 m | 6 in |
| E Height - stowed** | 2.59 m | 8 ft 6 in | 2.59 m | 8 ft 6 in | 2.74 m | 9 ft |
| rails lowered | 1.92 m | 6 ft 3.5 in | 1.92 m | 6 ft 3.5 in | 2.08 m | 6 ft 10 in |
| F Length - stowed | 3.12 m | 10 ft 3 in | 3.12 m | 10 ft 3 in | 3.12 m | 10 ft 3 in |
| platform extended ¹ | 4.50 m | 14 ft 9 in | 4.50 m | 14 ft 9 in | 4.50 m | 14 ft 9 in |
| with outriggers | 3.76 m | 12 ft 4 in | 3.76 m | 12 ft 4 in | 3.76 m | 12 ft 4 in |
| G Width | 1.75 m | 5 ft 9 in | 1.75 m | 5 ft 9 in | 1.75 m | 5 ft 9 in |
| H Wheelbase | 2.29 m | 7 ft 6 in | 2.29 m | 7 ft 6 in | 2.29 m | 7 ft 6 in |
| A Ground clearance - center | 0.24 m | 9.5 in | 0.24 m | 9.5 in | 0.24 m | 9.5 in |

Productivity

| | | | | | | |
|-------------------------------------|-------------------|-----------|--------------|-----------|--------------|----------|
| Maximum platform occupancy (in/out) | 4/4 | | 4/2 | | 3/2 | |
| Lift capacity | 680 kg | 1,500 lbs | 454 kg | 1,000 lbs | 363 kg | 800 lbs |
| lift capacity - extension deck | 136 kg | 300 lb | 136 kg | 300 lb | 136 kg | 300 lb |
| Drive height | full height | | full height | | full height | |
| Drive speed - stowed | 5.6 km/h | 3.5 mph | 5.6 km/h | 3.5 mph | 5.6 km/h | 3.5 mph |
| Drive speed - raised | 0.5 km/h | 0.3 mph | 0.5 km/h | 0.3 mph | 0.5 km/h | 0.3 mph |
| Gradeability - stowed*** | 40% | | 35% | | 35% | |
| Maximum outrigger levelling: | front/back uphill | | 5.3°/4.2° | | 5.3°/4.2° | |
| side to side | 11.7° | | 11.7° | | 11.7° | |
| Turning radius - inside | 2.11 m | 83 in | 2.11 m | 83 in | 2.11 m | 83 in |
| Turning radius - outside | 4.6 m | 181.2 in | 4.6 m | 181.2 in | 4.6 m | 181.2 in |
| Raise/lower speed | 36/33 sec | | 42/28 sec | | 69/46 sec | |
| Controls | proportional | | proportional | | proportional | |
| Drive | four wheel | | four wheel | | four wheel | |
| Tyres - rough terrain | 30x66 cm | 12x26 in | 30x66 cm | 12x26 in | 30x66 cm | 12x26 in |

Power

| | | | | | | |
|---------------------------|------------------------------|--------|------------------------------|--------|------------------------------|--------|
| Power source | Kubota D-1105 Diesel 24.8 hp | | Kubota D-1105 Diesel 24.8 hp | | Kubota D-1105 Diesel 24.8 hp | |
| Fuel tank capacity | 37.9 L | 10 gal | 37.9 L | 10 gal | 37.9 L | 10 gal |
| Hydraulic system capacity | 68.1 L | 18 gal | 68.1 L | 18 gal | 68.1 L | 18 gal |

Sound & Vibration Levels


| | | | | | | |
|---|-----------------------|--------------------------|-----------------------|--------------------------|-----------------------|--------------------------|
| Sound pressure level (ground workstation) | 85 dBA | 85 dBA | 85 dBA | 85 dBA | 85 dBA | 85 dBA |
| Sound pressure level (platform workstation) | 79 dBA | 79 dBA | 79 dBA | 79 dBA | 79 dBA | 79 dBA |
| Vibration | <2.5 m/s ² | 8 ft 2 in/s ² | <2.5 m/s ² | 8 ft 2 in/s ² | <2.5 m/s ² | 8 ft 2 in/s ² |

Weight****

| | | | | | | |
|---|------------|-----------|------------|-----------|------------|------------|
| CE base machine | 3,309 kg | 7,295 lbs | 3,490 kg | 7,695 lbs | 4,681 kg | 10,320 lbs |
| The basic unit has the extension deck, foam filled RT tyres (or non marking RT tyres as option), CE link guard and CE load sense. | | | | | | |
| Unit weight modifiers for options | | | | | | |
| Outriggers | add 392 kg | 865 lbs | add 392 kg | 865 lbs | add 392 kg | 865 lbs |
| Generator | add 73 kg | 160 lbs | add 73 kg | 160 lbs | add 73 kg | 160 lbs |

Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280);
2004/108/EC (EMC); 2000/14/EC (Outdoor Noise)

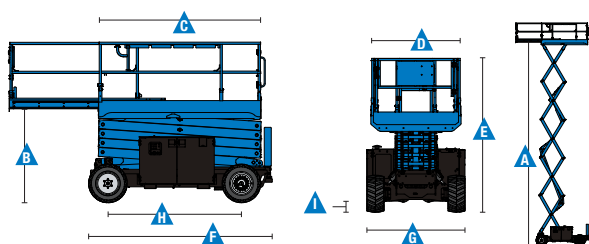

¹ An extension deck of 1.52 m (5 ft) is standard on machines fitted with the standard outriggers

* The metric equivalent of working height adds 2 m to platform height.
** Based on RT tyres. Deduct 5.8 cm (2 in) for non-marking tyres.
*** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
**** Weight will vary depending on options and/or country standards.



Features

| Standard Features | Easily Configured To Meet Your Needs | Options & Accessories |
|-------------------|--------------------------------------|-----------------------|
|-------------------|--------------------------------------|-----------------------|

Measurements

GS-2669 RT

- 9.70 m (31 ft 9 in) working height
- Up to 680 kg (1,500 lbs) lift capacity

GS-3369 RT

- 11.75 m (38 ft 6 in) working height
- Up to 454 kg (1,000 lbs) lift capacity

GS-4069 RT

- 14.12 m (46 ft 3 in) working height
- Up to 363 kg (800 lbs) lift capacity

Productivity

- Drive at full height
- Folding guardrail with full height swing gate
- Platform controls with fault indicator
- Proportional lift and drive
- AC power to platform
- Front oscillating axle
- Positive traction control
- Four-wheel braking
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing LED beacons
- Horn
- Hour meter
- Hydraulic oil cooler
- Telematics-Ready Connector

Power

- All engines are emissions compliant
- Swing-out engine tray

Platform

- 2.79 x 1.60 m (9 ft 2 in x 5 ft 3 in) steel frame platform with replaceable aluminium deck
- 1.52 m (5 ft) slide-out extension deck

Outriggers

- Automatic levelling hydraulic outriggers (standard)

Engine

- Kubota diesel 24.8 hp (18.5 kw)

Drive

- 4 x 4

Axle

- Front oscillating axle

Tyre Options


- Foam-filled rough terrain (standard)
- Foam-filled, non-marking rough terrain

Productivity Options

- Air line to platform
- Power to platform plug, socket with optional Residual-current Circuit Breaker with Overcurrent protection
- Biodegradable hydraulic oil
- Track & Trace⁽²⁾ (GPS unit providing machine location & operating information)
- Motion alarm

Power Options

- AC generator (110 V / 60 Hz or 240 V/50 Hz, 3000 W)⁽¹⁾ with oil cooler
- Hydraulic generator 110 V/50 Hz or 240 V/ 50 Hz with oil cooler
- Low temperature cut-out module
- Engine heater

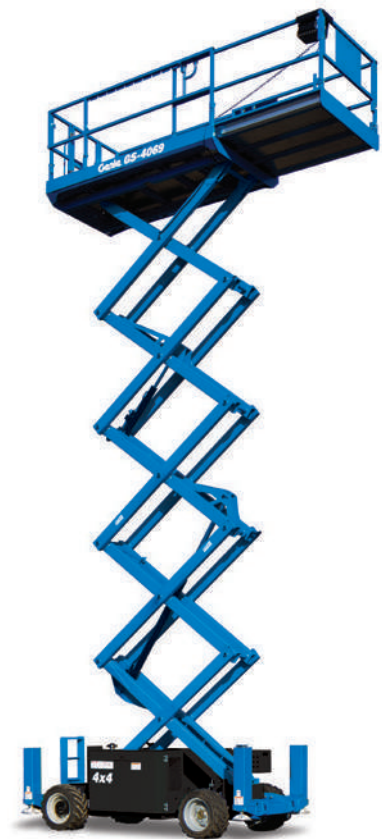

⁽¹⁾ Factory-fit option only

⁽²⁾ Includes a first 2 years subscription

Europe, Middle East, Africa and Russia Region

United Kingdom and Europe, T: +44 800 988 3799 (toll free) or +31 165 519 349

Middle East, Southern Africa, Russia and Turkey, T: +971 4 399 0381

Visit www.genielift.com/en-gb/about-genie/locations to view our global locations list

Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2020 Terex Corporation.

